

DRAWING NO. **ASY-5797** REVISION **REL-02**

PROJECT CODE: **LICK-51**

REQUIRED PER TELESCOPE: 2

MATERIAL: N/A

CONDITION: N/A

FINISH: N/A






FINISH COLOR: N/A

APPROXIMATE MASS: 3494 gm

REFERENCE DOCUMENTS:

REV.	DATE	DESCRIPTION	CHK'D	APPVD	ZONE
1	8/17/04	INITIAL RELEASE	E. D.	GP	
2	3/26/2009	REVISED PER ECO-1022			

Controlled Document
Confirm revision before using

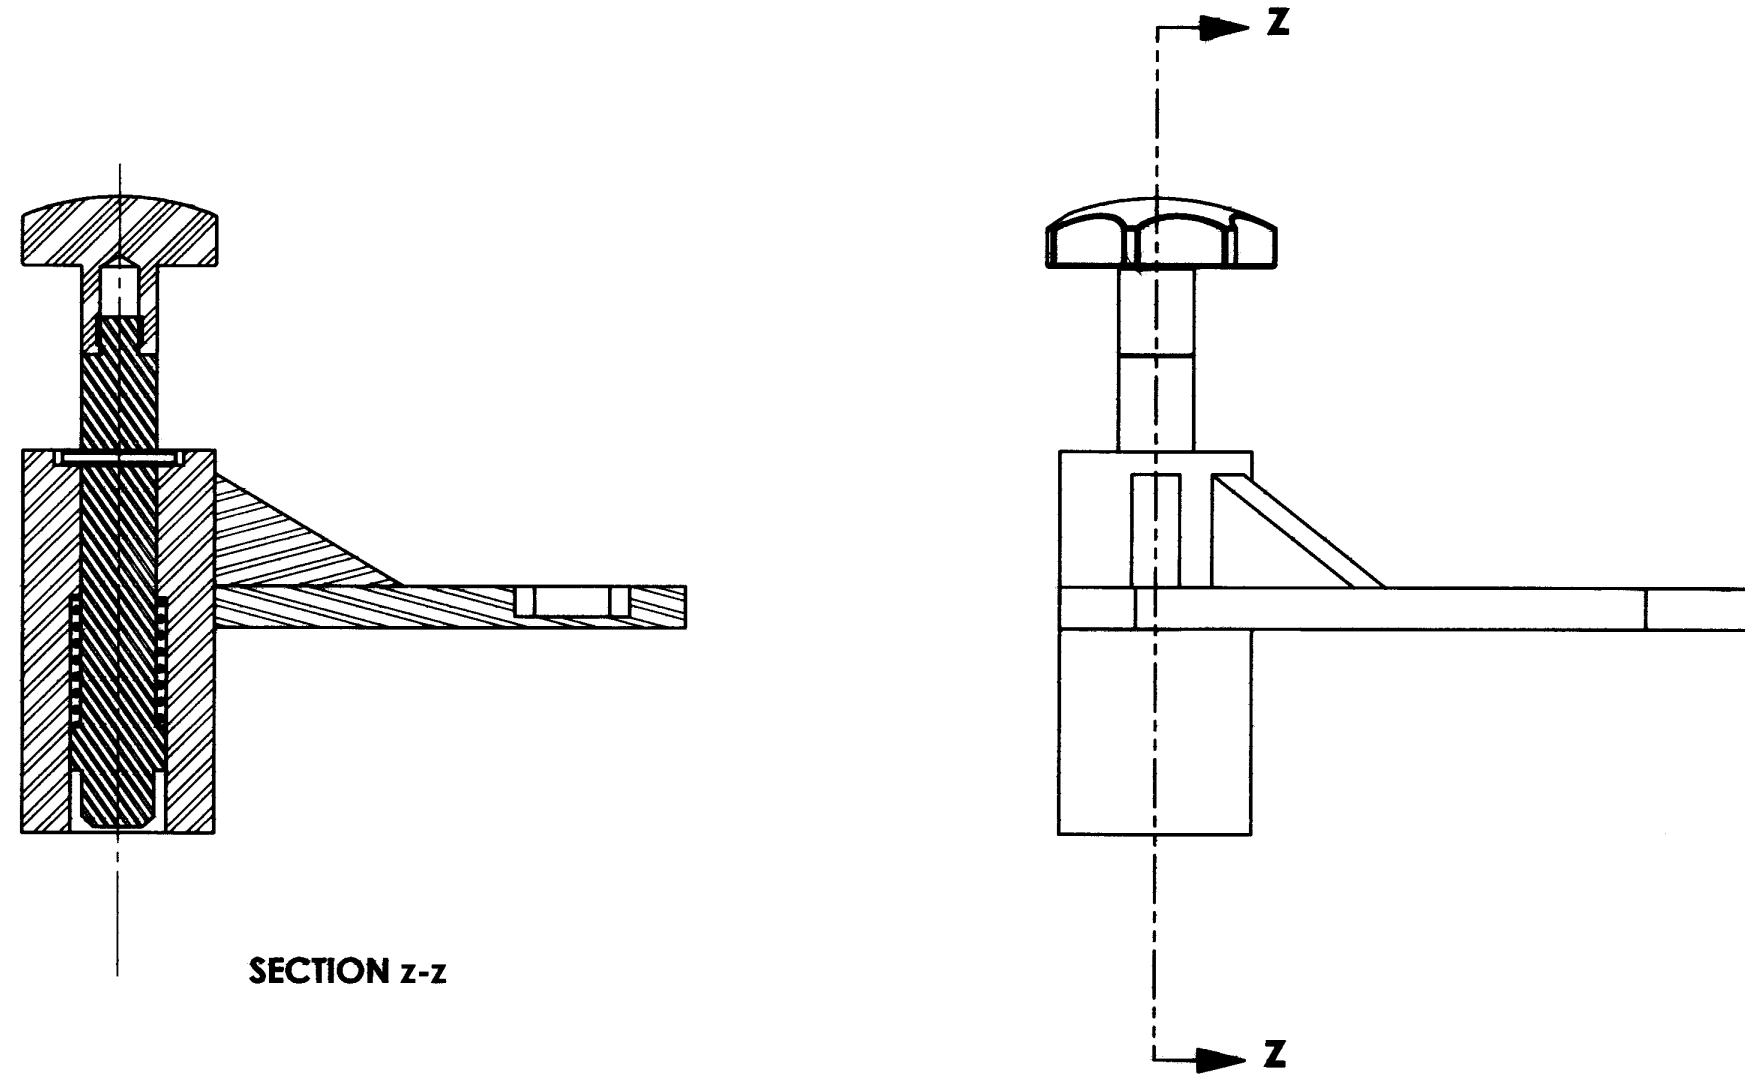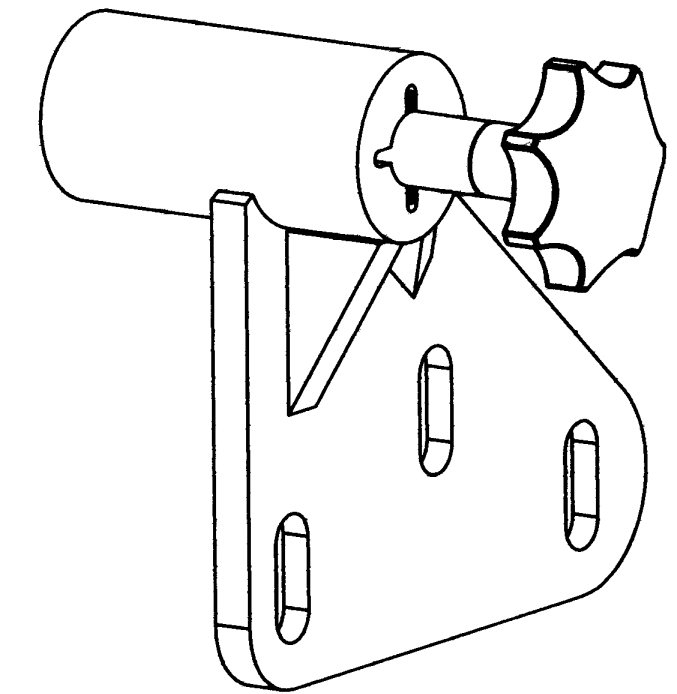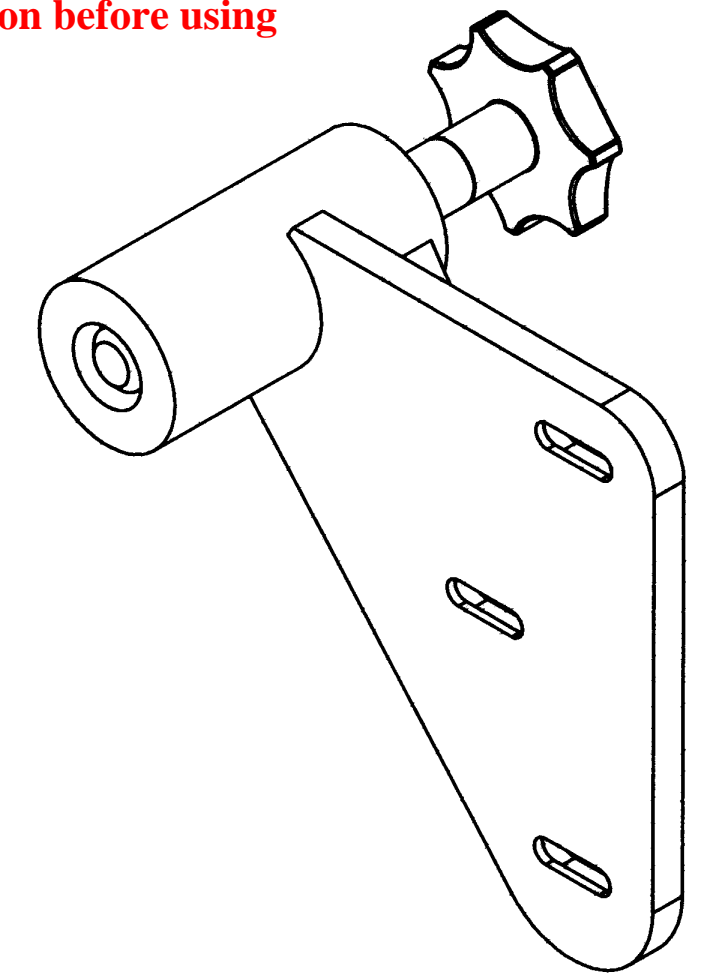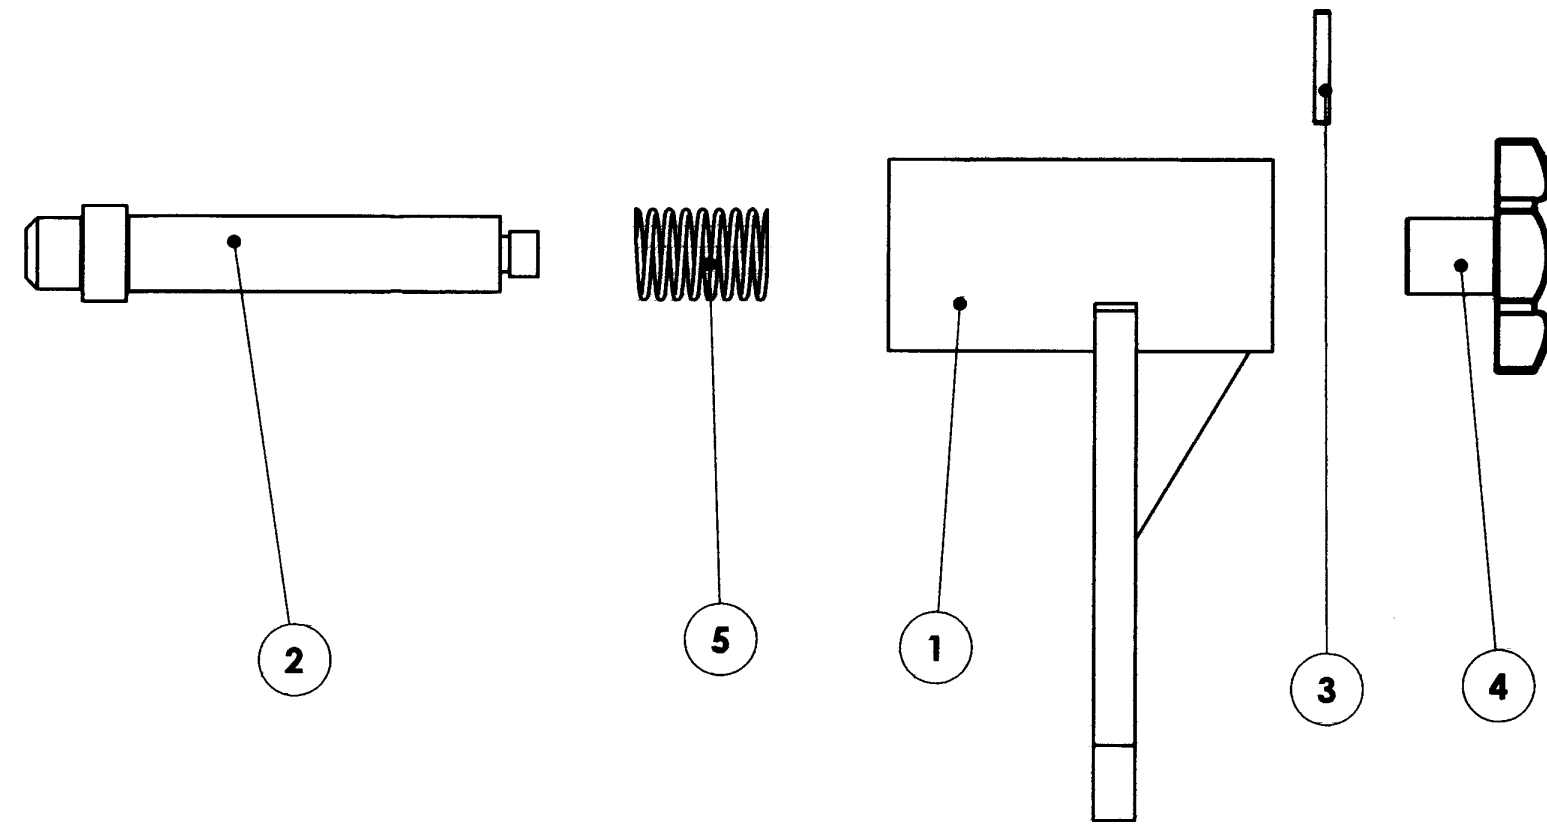

DO NOT SCALE DRAWING

ITEM NO.	Retracted/QTY.	PART NUMBER	DESCRIPTION	Material	Weight
5	1	LEE SPRING LC-072L-8-S	COMPRESSION SPRING	18-8 STAINLESS STEEL	12
4	1	McMaster-Carr 6720K241	M12 PLASTIC KNOB	BLACK NYLON WITH A STEEL INSERT	57
3	1	Spring Pin ISO 8752 - 4 x 30 - C		18-8 STAINLESS STEEL	2
2	1	COM-5802	STAYPIN	304 STAINLESS STEEL	334
1	1	COM-5798	STAYPIN BRACKET - MACHINING	AISI 304 STAINLESS	3090

COPYRIGHT
 THIS DOCUMENT & ENCLOSED PROPRIETARY INFORMATION REMAINS THE PROPERTY OF EOS TECHNOLOGIES, INC. THE INTELLECTUAL PROPERTY AND INFORMATION HEREIN MAY NOT BE COPIED NOR DISCLOSED WITHOUT WRITTEN CONSENT OF EOS TECHNOLOGIES, INC. MANAGEMENT

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES:
 X.X = ±0.25MM
 X.XX = ±0.10MM
 ANGLES = ±0.5°
 ROUNDS AND FILLETS ARE R3.0
 BREAK ALL SHARP EDGES
 0.25MM X 0.25MM

WELDS ARE:
 MAX SIZE FILLET OR
 FULL PENETRATION GROOVE
 AS APPROPRIATE.
 ALL WELDS ARE CONTINUOUS
 NEAREST NOMINAL STOCK SIZE
 MAY BE SUBSTITUTED.
 INDICATED MACHINED SURFACES

3.2

DESIGN	J. CATONE	DATE	8/17/04
DRAWN	AML	DATE	8/31/04
CHECKED	E. DALE	DATE	2/11/05
APPROVED	G. PENTLAND	DATE	2/11/05



EOS TECHNOLOGIES, INC.
 3160 E. TRANSCON WAY, SUITE 180, TUCSON, AZ 85706 PH: (520) 624-6399

TITLE STAYPIN BRACKET ASSEMBLY		
DRAWING NO. ASY-5797	STATUS Released	REVISION REL-02
SHEET 1 OF 1	SCALE 1:2	SHEET SIZE A2